



## Yali Parada - Panel Radiator

Digital controls and bright digital display make the Yali Parada a simple yet powerful addition to any home. Fully programmable temperature range, operating modes and surface temperature bring flexibility and ease of use within the reach of everyone. Enjoy the smooth panel design of this sleek oil-filled radiator from LVI. Like all the Yali range, the Yali Parada is designed with two independent heating panels, type 22, front and rear, which offer a more precise and economical way to heat the home. The Yali Parada is also available in a single panel variety, type 11. Yali Parada has the same intelligent features as the Yali Digital: open window function and a digital thermostat that can be easily connected to wired systems, wireless systems or WiFi. This radiator also offers separate temperature control of front and rear panels for better energy efficiency and adjustable maximum surface temperature for example child safety feature.

### TECHNICAL DATA

- Oil-filled radiator with vegetable oil.
- Frost protection (0,5-10°C)
- Made from strong steel of the highest quality.
- Hard-wearing white epoxy paint (RAL 9016).
- Can be connected to external programmer, wireless programmer or central controller with WiFi facilities
- Simple to use, rapid heating and even temperature across the entire surface.
- System for locking the mounting device.
- Quiet, odour-free and non-allergenic.
- The radiators have convector plates and are for right-hand mounting

### THERMOSTAT

- Advanced thermostat with precise regulation. Several temperature reduction options.
- Adjustable maximum surface temperature of 90°C (normal) and 75 or 60°C (reduced). The 75 and 60°C modes reduce the output of the radiator to 70 and 55% for a single and 90 and 80% for a double panel.
- Sequential temperature control of the front and rear panel.
- Window open function.
- Lockable thermostat unit.
- Thermostat guard made from flame retardant and UV resistant ABS-PC V0.


- The temperature reduction can be activated manually or with a separate control wire connected to a central timer.
- The radiator is supplied with a cable with a "plug-in contact" for connecting the radiator and the enclosed wall outlet box.
- Can be controlled from other radiators or control other radiators in a master-slave configuration.

### ACCESSORIES

- Splash proof cover for IP 44.

### PACKAGE

- Delivered with wall brackets and screws for permanent installation.
- The radiators have convector plates and are to be mounted with the thermostat on the right hand side.

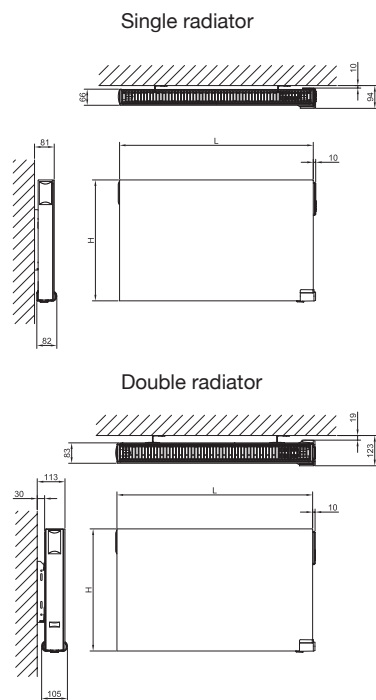

## HEIGHT 300 MM

Model	Article	Power W	Height mm	Length mm	Voltage	Weight
Single	8501118	250	300	400	230	6
Single	8501119	250	300	400	400	6
Single	8501120	500	300	800	230	11
Single	8501121	500	300	800	400	11
Double	8501122	500	300	500	230	11
Double	8501123	500	300	500	400	11
Single	8501124	750	300	1100	230	17
Single	8501125	750	300	1100	400	17
Double	8501126	750	300	800	230	17
Double	8501127	750	300	800	400	17
Single	8501128	1000	300	1500	230	14
Single	8501129	1000	300	1500	400	14
Double	8501130	1000	300	1000	230	22
Double	8501131	1000	300	1000	400	22
Double	8501132	1250	300	1300	230	27
Double	8501133	1250	300	1300	400	27
Double	8501134	1500	300	1600	230	34
Double	8501135	1500	300	1600	230	34
Double	8501136	2000	300	2000	230	42
Double	8501137	2000	300	2000	400	42

## HEIGHT 500 MM

Model	Article	Power W	Height mm	Length mm	Voltage	Weight
Single	8501138	500	500	550	230	12
Single	8501139	500	500	550	400	12
Double	8501140	500	500	400	230	14
Double	8501141	500	500	400	400	14
Single	8501142	750	500	800	230	17
Single	8501143	750	500	800	400	17
Double	8501144	750	500	500	230	17
Double	8501145	750	500	500	400	17
Single	8501146	1000	500	1050	230	23
Single	8501147	1000	500	1050	400	23
Double	8501148	1000	500	650	230	22
Double	8501149	1000	500	650	400	22
Single	8501150	1250	500	1300	230	29
Single	8501151	1250	500	1300	400	29
Double	8501152	1250	500	800	230	27
Double	8501153	1250	500	800	400	27
Double	8501154	1500	500	950	230	32
Double	8501155	1500	500	950	400	32
Double	8501156	2000	500	1250	230	42
Double	8501157	2000	500	1250	400	42



Splash proof cover for  
IP44.



- Can be connected to internet (Smart phone, tablet, computer) via router.
- Can be connected to GSM module
- Change operation modes and temperature.
- Collect data (consumption).

**SAN** Electro Heat a/s

Gillelejevej 30 - DK-3230 Graested - Denmark

Tel.: +45 48 39 88 88 - Fax: +45 48 39 88 98 - san@san-as.com - www.san-as.com

CVR No.: 42 16 59 13 - A/S reg. No.: 53 053