



SAN Convecteur Furnace Type KO


Application:

The SAN convecteur furnaces KO are especially designed for heating of church interior and are mounted below the benches or in convecteur pits. The construction fulfils the Danish government circular from the Church Ministry of Aug. 10th 1993 concerning implementing and use of church heating systems.

The convecteur furnace type KO is manufactured from powder painted steel plate, stainless tubular heating element and with fittings or legs for mounting under bench or on floor in convecteur pit respectively. Silent operation.

Can be delivered with tubular heating element for 3 power steps (1/4 - 1/2 - 1/1).

Power: Approx. 400W/m
 Voltage: 230V, 400V or 3x400V
 Max length: 2400mm
 Colour: grey RAL 7032
 Protection class: IP 22
 Surface temperature: 65°C

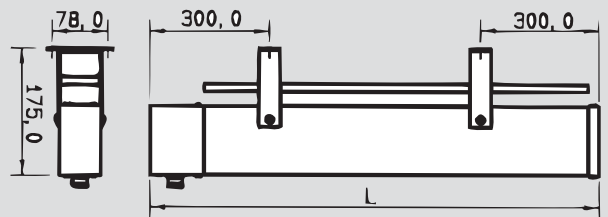

Other length, power as well as colour are available upon request.

Convecteur Furnace Type KO

Type	Power W	Length	Part no.
KO 65	260	650	82600
KO 80	325	800	82605
KO 95	380	950	82610
KO 110	450	1100	82615
KO 125	500	1250	82620
KO 140	560	1400	82625
KO 150	600	1500	82630
KO 170	680	1700	82635
KO 190	760	1900	82640
KO 210	840	2100	82650
KO 230	920	2300	82655