



## Yali Digital - Panel Radiator

Yali Digital is a modernly designed panel radiator with a series of new features. Ideal for any room in the house, the Yali Digital offers superb temperature controllability, with a clear visual display discreetly housed on the side panel. Like many of the Yali range, the Yali Digital has a touch-screen control as an option and can easily be connected to WiFi. The touch-screen control is future-proof and easily upgraded when new functions become available. For double-panelled Yali radiators, the panels can be controlled in parallel (together at the same time) or in sequence (cascade), where both radiant and convective heat is used. This is most useful with a large difference between the set and measured room temperature. When a lot of power is required to bridge that temperature gap, the combination of heat types makes a real difference. When the temperature difference is small, only the front panel is required. This involves more radiant heat from the front, and less heat lost to the rear wall, since the inactive backpanel functions like a heat-screen.

### TECHNICAL DATA

- Oil-filled radiator with vegetable oil.
- Frost protection (0,5-10°C)
- Made from strong steel of the highest quality.
- Hard-wearing white epoxy paint (RAL 9016).
- Can be connected to wired external programmer, wireless programmer or central controller with WiFi facilities
- Simple to use, rapid heating and even temperature across the entire surface.
- System for locking the mounting device.
- Quiet, odour-free and non-allergenic.
- The radiators have convector plates and are for right-hand mounting
- Sequential temperature control of the front and rear panel.
- Window open function.
- Lockable thermostat unit.

### THERMOSTAT


- Advanced thermostat with precise regulation. Several temperature reduction options.
- Adjustable maximum surface temperature of 90°C (normal) and 75 or 60°C (reduced). The 75 and 60°C modes reduce the output of the radiator to 70 and 55% for a single and 90 and 80% for a double panel.
- Sequential temperature control of the front and rear panel.
- Window open function.
- Lockable thermostat unit.
- Thermostat guard made from flame retardant and UV resistant ABS-PC V0.
- The temperature reduction can be activated manually or with a separate control wire connected to a central timer.
- The radiator is supplied with a cable with a "plug-in contact" for connecting the radiator and the enclosed wall outlet box.
- Can be controlled from other radiators or control other radiators in a master-slave configuration.

### ACCESSORIES

- Can be supplied with a plug (230 V) instead of a wall outlet box.
- When ordering, use the same model designation as the standard radiators, but with the supplement P (YALI D P). The central temperature reduction and master-slave option are not available in this version.
- Splash proof cover for IP 44., art. nr.: 8555095.

### PACKAGE

- Delivered with wall brackets and screws for permanent installation.
- The radiators have convector plates and are to be mounted with the thermostat on the right hand side.

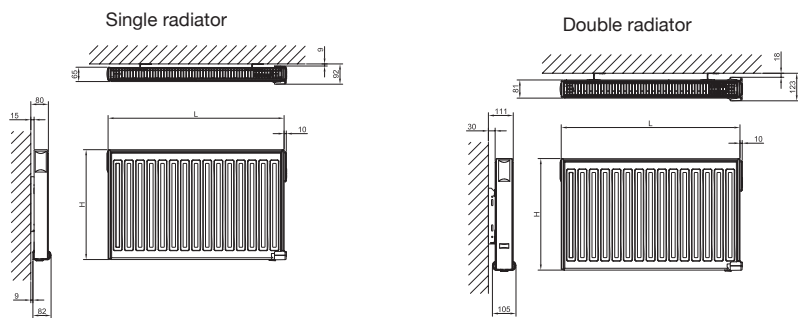

## HEIGHT 300 MM

Model	Article	Power W	Height mm	Length mm	Voltage	Weight
Single	8501058	250	300	400	230	5
Single	8501059	250	300	400	400	5
Single	8501060	500	300	800	230	9
Single	8501061	500	300	800	400	9
Double	8501062	500	300	500	230	10
Double	8501063	500	300	500	400	20
Single	8501064	750	300	1100	230	14
Single	8501065	750	300	1100	400	14
Double	8501066	750	300	800	230	15
Double	8501067	750	300	800	400	15
Single	8501068	1000	300	1500	230	10
Single	8501069	1000	300	1500	400	10
Double	8501070	1000	300	1000	230	19
Double	8501071	1000	300	1000	400	19
Single	8501072	1250	300	1300	230	24
Single	8501073	1250	300	1300	400	24
Double	8501074	1500	300	1600	230	30
Double	8501075	1500	300	1600	230	30
Double	8501076	2000	300	2000	230	37
Double	8501077	2000	300	2000	400	37

## HEIGHT 500 MM

Model	Article	Power W	Height mm	Length mm	Voltage	Weight
Single	8501078	500	500	550	230	10
Single	8501079	500	500	550	400	10
Double	8501080	500	500	400	230	12
Double	8501081	500	500	400	400	12
Single	8501082	750	500	800	230	14
Single	8501083	750	500	800	400	14
Double	8501084	750	500	500	230	15
Double	8501085	750	500	500	400	15
Single	8501086	1000	500	1050	230	19
Single	8501087	1000	500	1050	400	19
Double	8501088	1000	500	650	230	20
Double	8501089	1000	500	650	400	20
Single	8501090	1250	500	1300	230	23
Single	8501091	1250	500	1300	400	23
Double	8501092	1250	500	800	230	24
Double	8501093	1250	500	800	400	24
Double	8501094	1500	500	950	230	28
Double	8501095	1500	500	950	400	28
Double	8501096	2000	500	1250	230	37
Double	8501097	2000	500	1250	400	37



Splash proof cover for  
IP44



- Can be connected to internet (Smart phone, tablet, computer) via router.
- Can be connected to GSM module
- Change operation modes and temperature.
- Collect data (consumption).

**SAN** Electro Heat a/s

Gillelejevej 30 - DK-3230 Graested - Denmark

Tel.: +45 48 39 88 88 - Fax: +45 48 39 88 98 - san@san-as.com - www.san-as.com

CVR No.: 42 16 59 13 - A/S reg. No.: 53 053